

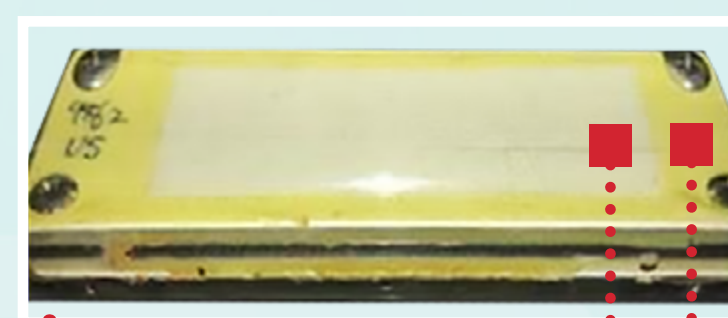


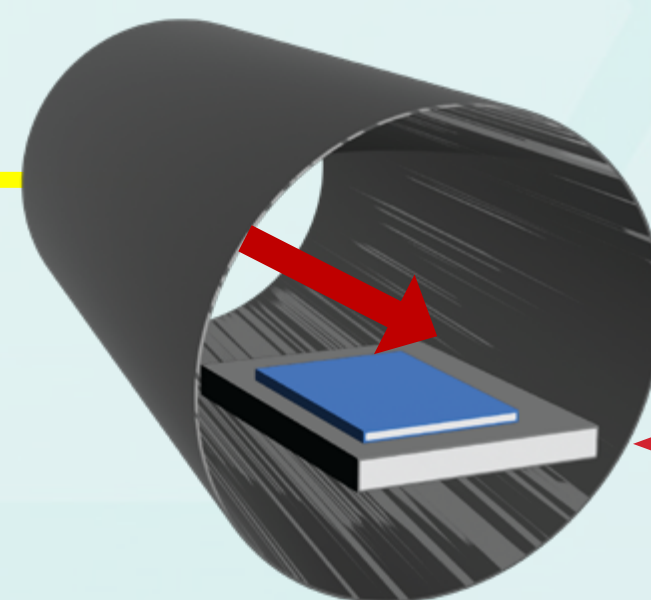

ADHESIVE STRENGTH TEST OF MARINGLIDE™

Water flow test results: superior adhesion in underwater dynamic environments

→ water flow

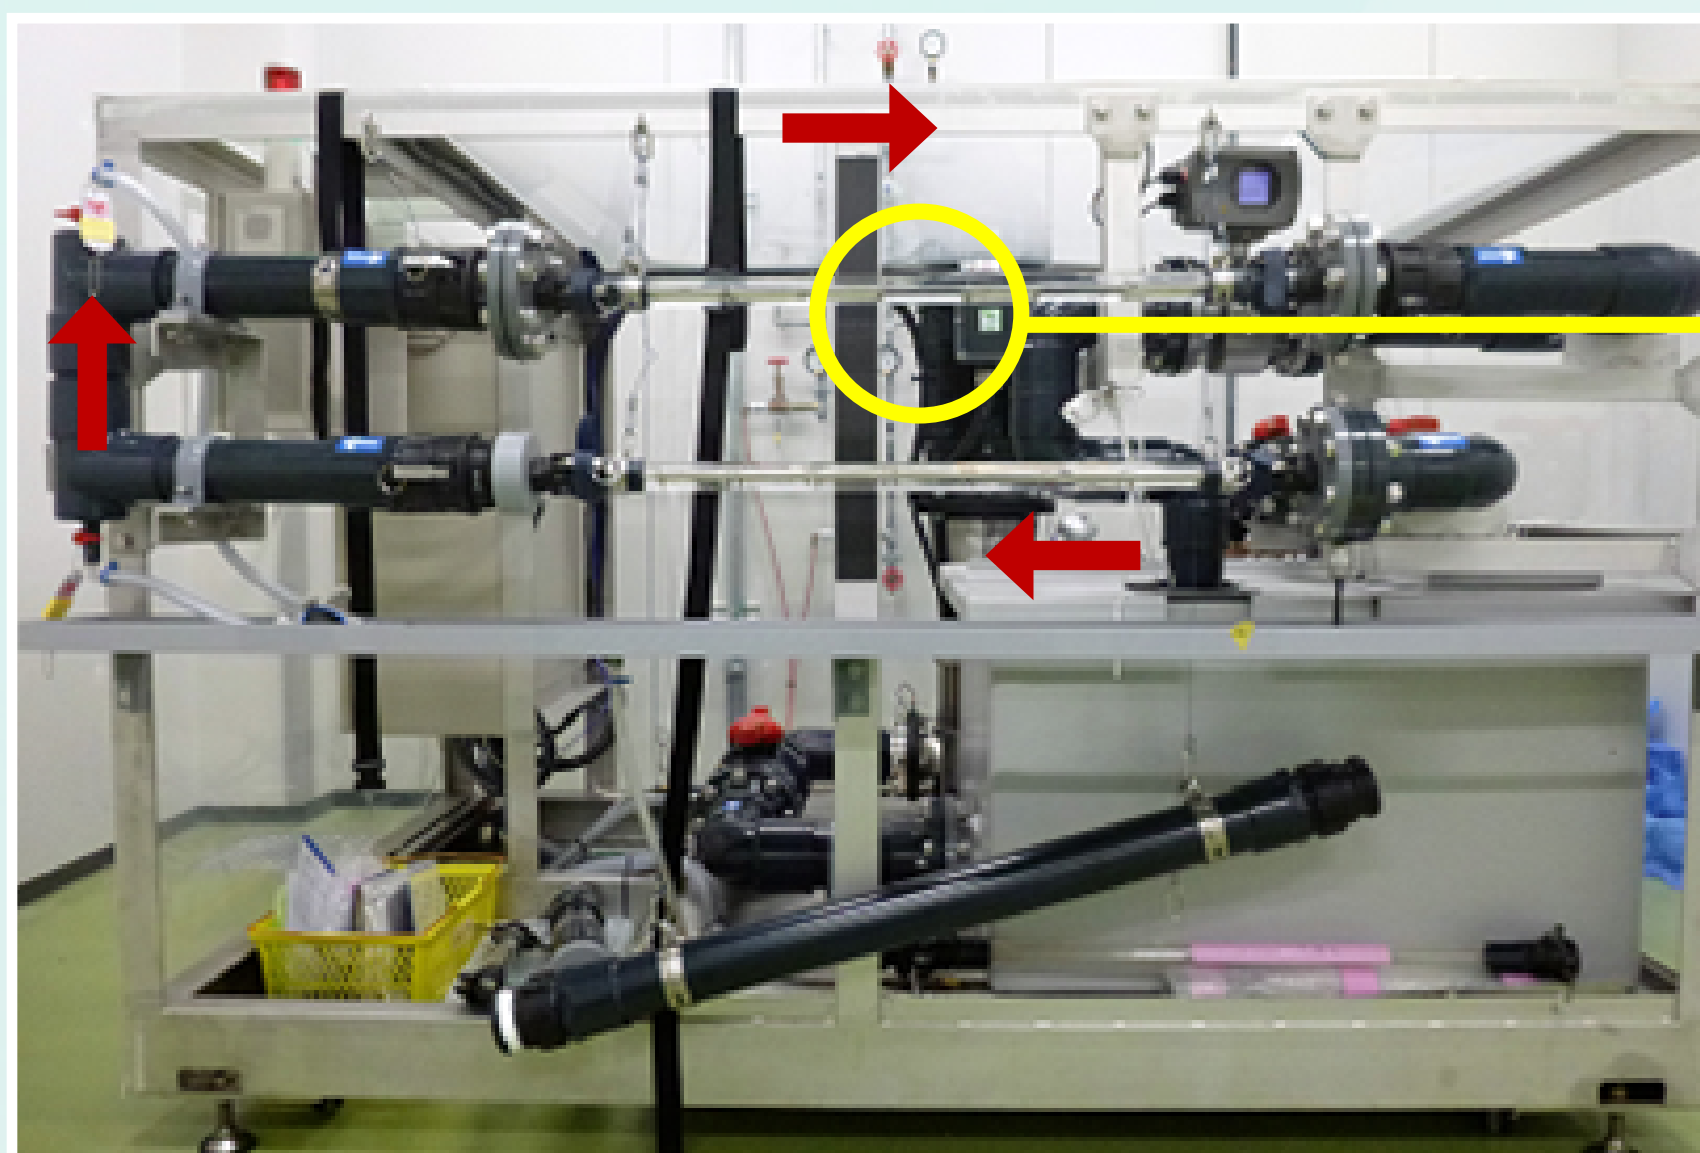

Maringlide™ film
PU substrate

No peeling at 15 knots x 200 hours
= 7,000 km of actual sailing

PRODUCT



Maringlide™

APPLICATIONS





sonars




cameras

No decrease in the adhesive strength after one year

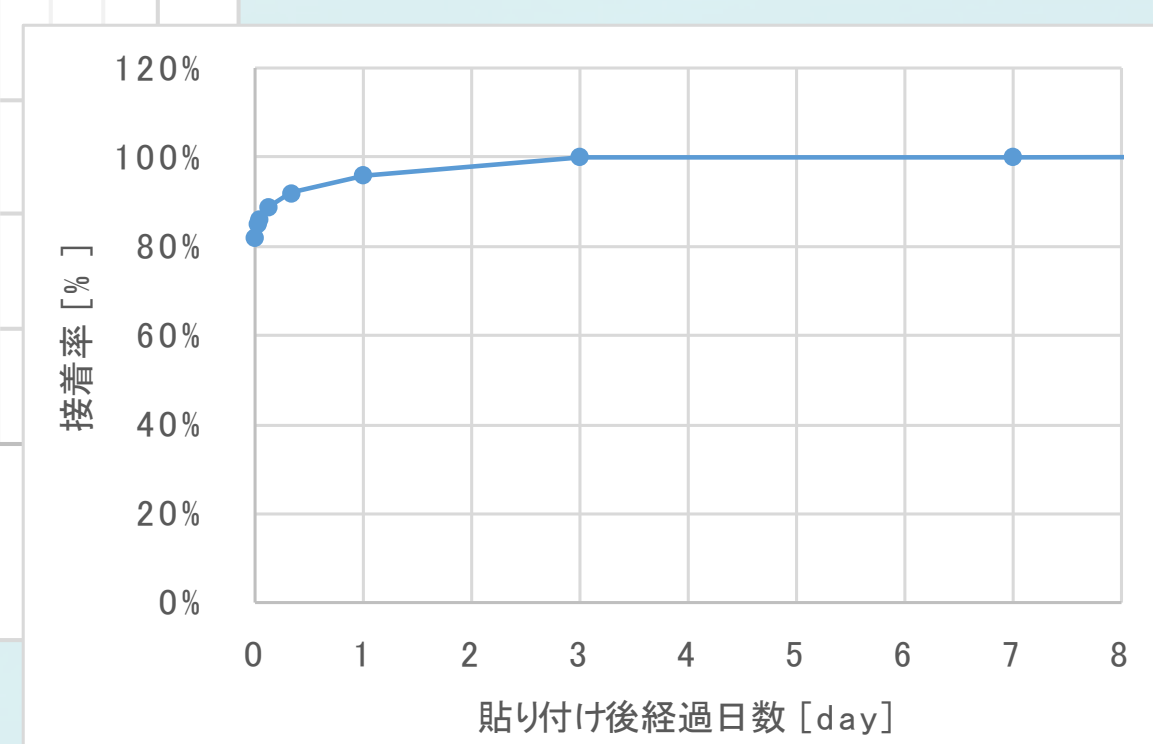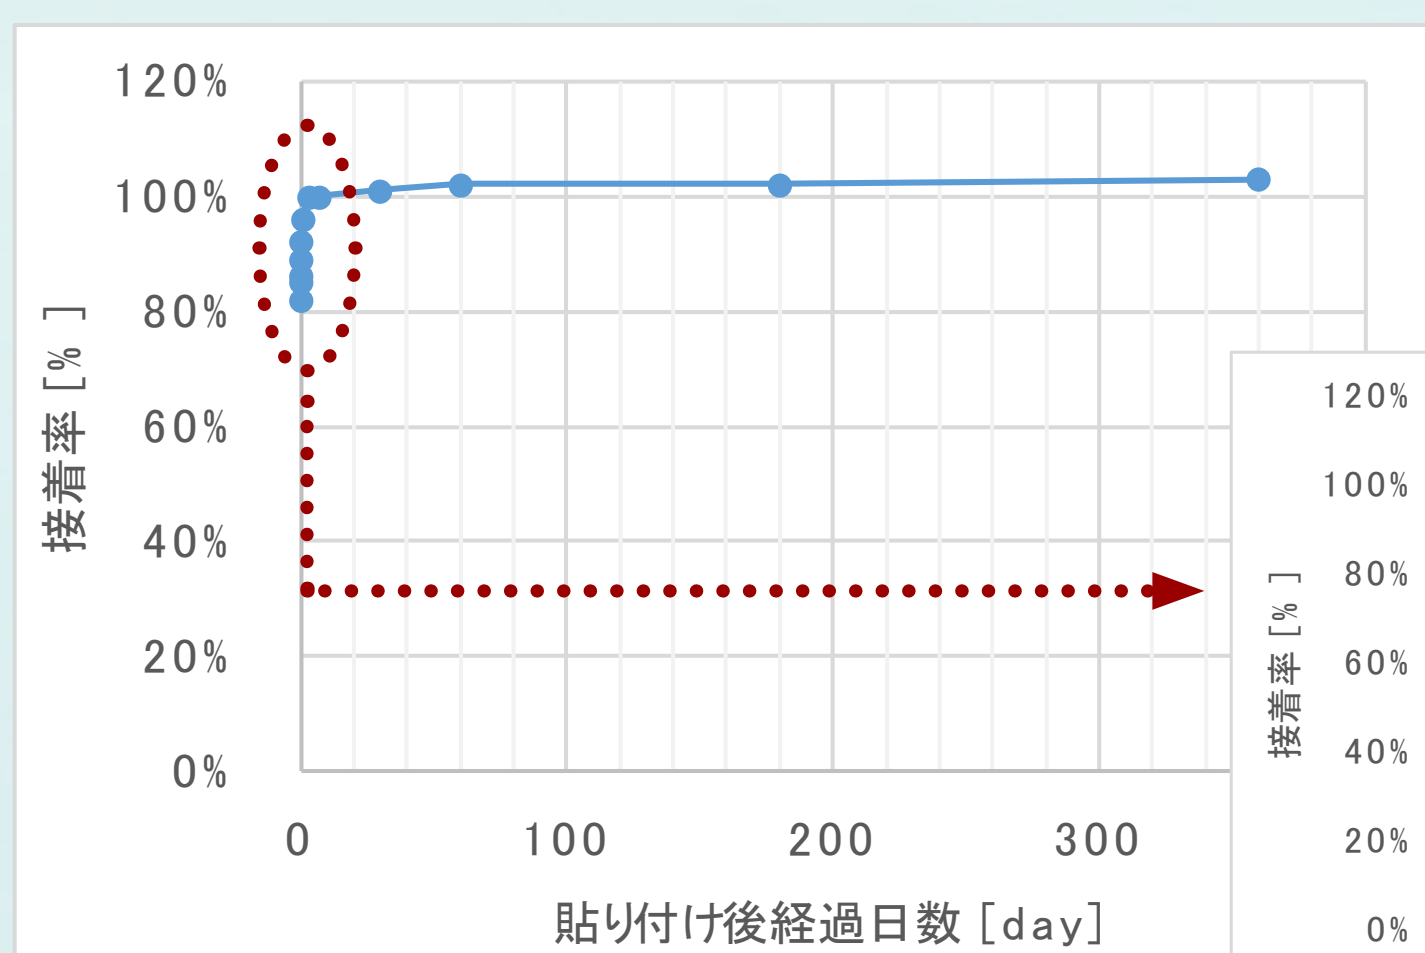

LAYOUT

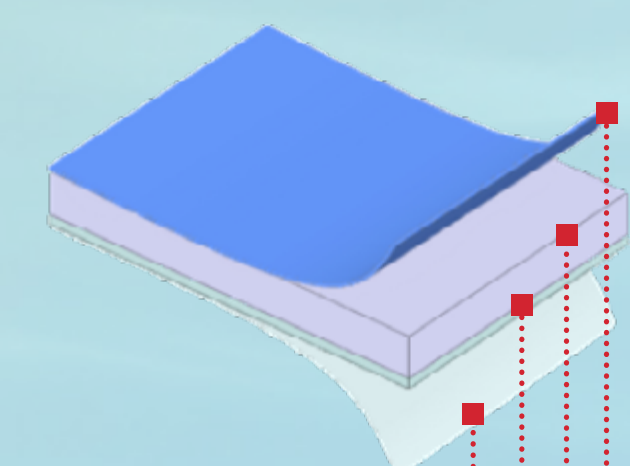

release layer
adhesive layer
anti-fouling film
protective tape